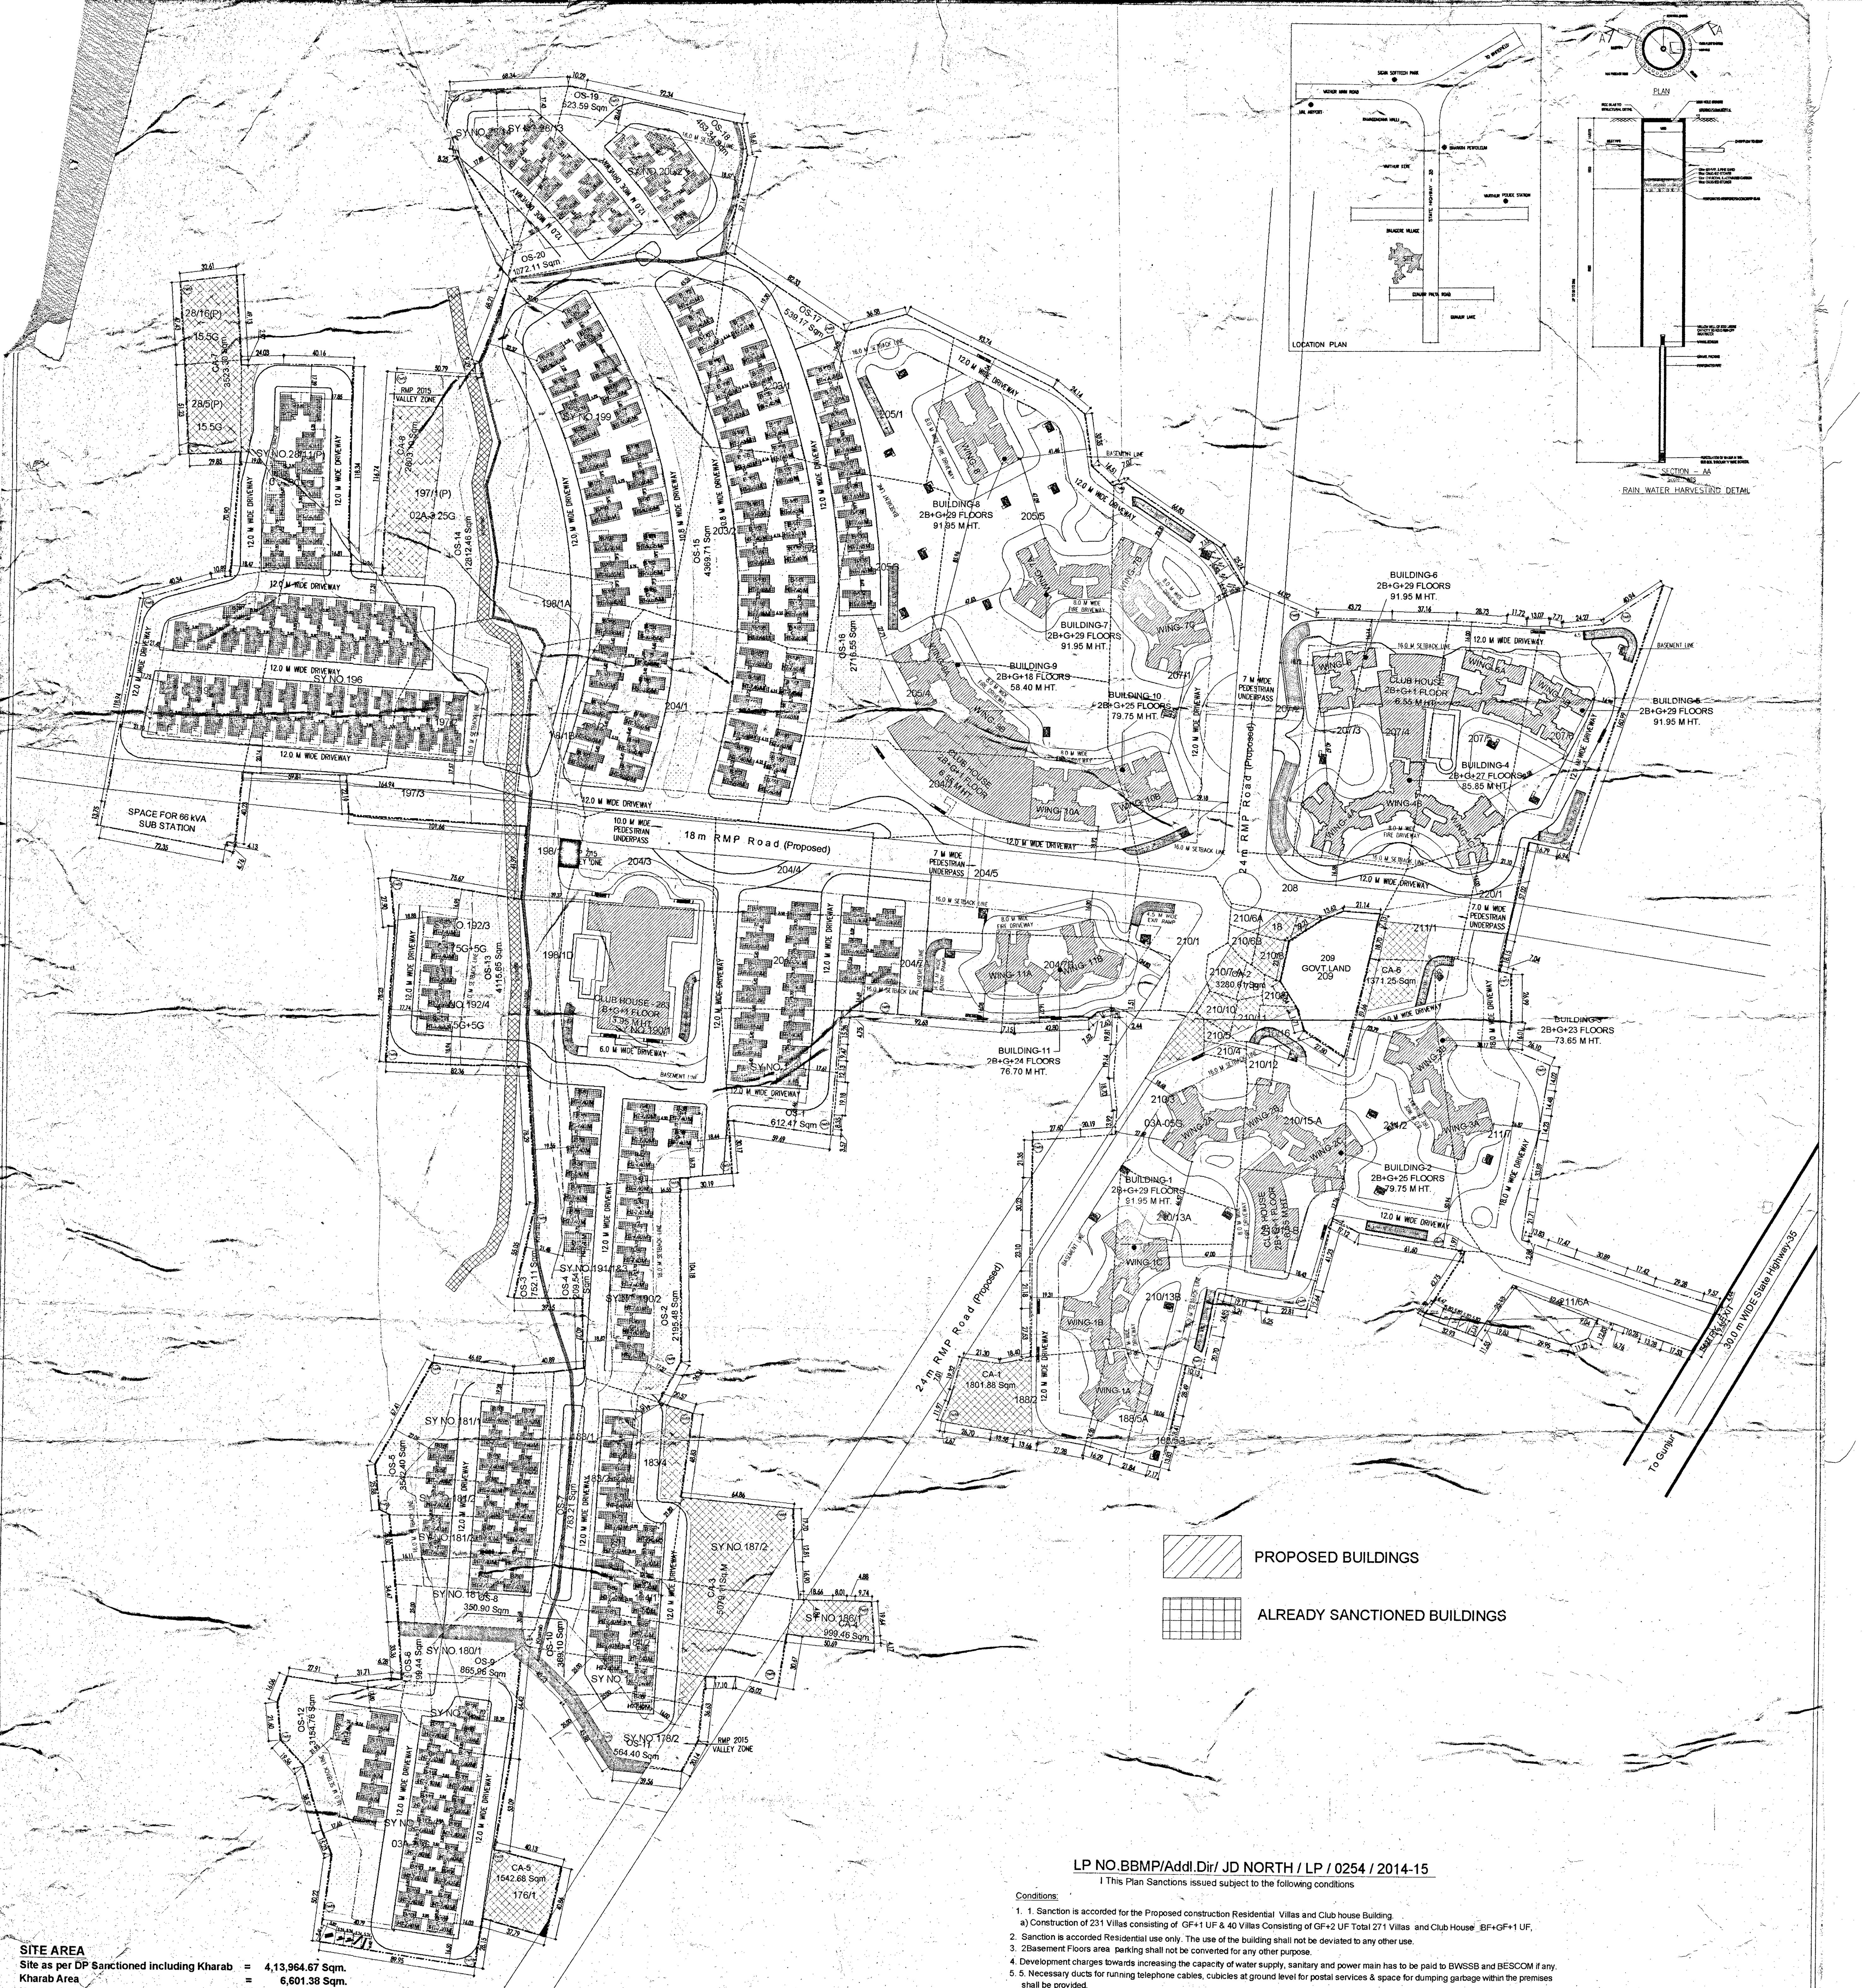


SITE AREA

Site as per DP Sanctioned including Kharab = 4,13,964.67 Sqm.
Kharab Area = 6,601.38 Sqm.
Net Site Area Considered as per Khata = 4,01,318.35 Sqm. (99 Ac. 6.75 Gu.)

Net Site Area Considered 4,01,318.35 Sqm.
Civic Amenities As per DP 20,401.39 Sqm.
Net Site Area Considered for FAR 3,80,916.96 Sqm.

Net Site Area Considered 4,01,318.35 Sqm.
Area reserved for proposed RMP roads 23,592.97 Sqm.
Net Site Area Considered for Coverage 3,77,725.38 Sqm.

CLUB HOUSE AREA STATEMENT

FLOORS	BUA	DEDUC	NET
BASEMENT FLOOR	4,875.64	3,504.97	1,370.67
GROUND FLOOR	4,220.79	16.97	4,203.82
FIRST FLOOR	2,520.55	5.00	2,515.55
TERRACE FLOOR	12.34	12.34	-
TOTAL	11,629.32	3,539.28	8,090.04

VILLAS - A TYPE-1

FLOORS	BUA	DEDUC	NET	UNITS
GROUND FLOOR	152.01	30.91	121.10	79
FIRST FLOOR	111.91	-	111.91	-
TERRACE FLOOR	22.27	22.27	-	-
TOTAL	286.19	53.18	233.01	79

Total FAR Area for 79 Units = 18,407.79

VILLAS - A TYPE-1 (Bldg. 65)

FLOORS	BUA	DEDUC	NET	UNITS
GROUND FLOOR	123.44	30.55	92.89	01
FIRST FLOOR	99.16	-	99.16	-
TERRACE FLOOR	22.27	22.27	-	-
TOTAL	286.19	52.82	192.05	01

Total FAR Area for 01 Units = 192.05

VILLAS - A TYPE-2

FLOORS	BUA	DEDUC	NET	UNITS
GROUND FLOOR	152.27	32.06	120.21	48
FIRST FLOOR	114.03	-	114.03	-
TERRACE FLOOR	15.37	15.37	-	-
TOTAL	281.67	47.43	234.24	48

Total FAR Area for 48 Units = 11,243.52

VILLAS - A TYPE-3, UNIT 280

FLOORS	BUA	DEDUC	NET	UNITS
GROUND FLOOR	134.23	27.05	107.18	01
FIRST FLOOR	139.18	-	139.18	-
TOTAL	273.41	27.05	246.36	01

Total FAR Area for 01 Unit = 246.36

VILLAS - A TYPE-3, UNIT 281

FLOORS	BUA	DEDUC	NET	UNITS
GROUND FLOOR	135.81	31.67	104.14	01
FIRST FLOOR	123.14	-	123.14	-
TOTAL	258.95	31.67	227.28	01

Total FAR Area for 01 Unit = 227.28

VILLAS - A TYPE-3, UNIT 282

FLOORS	BUA	DEDUC	NET	UNITS
GROUND FLOOR	155.86	28.44	127.42	01
FIRST FLOOR	111.46	-	111.46	-
TOTAL	267.32	28.44	238.88	01

Total FAR Area for 01 Unit = 238.88

VILLAS - B TYPE-1

FLOORS	BUA	DEDUC	NET	UNITS
GROUND FLOOR	182.92	32.05	150.87	42
FIRST FLOOR	165.18	-	165.18	-
TERRACE FLOOR	16.89	16.89	-	-
TOTAL	364.99	48.94	316.05	42

Total FAR Area for 42 Units = 13,274.10

VILLAS - B TYPE-2

FLOORS	BUA	DEDUC	NET	UNITS
GROUND FLOOR	191.95	31.27	160.68	57
FIRST FLOOR	149.40	-	149.40	-
TERRACE FLOOR	16.64	16.64	-	-
TOTAL	357.99	47.91	310.08	57

Total FAR Area for 57 Units = 17,674.56

VILLAS - B TYPE-2 (Bldg. 66)

FLOORS	BUA	DEDUC	NET	UNITS
GROUND FLOOR	106.14	Nil	106.14	01
FIRST FLOOR	101.91	-	101.91	-
TERRACE FLOOR	16.64	16.64	-	-
TOTAL	224.69	16.64	208.05	01

Total FAR Area for 01 Units = 208.05

VILLAS - C TYPE-1

FLOORS	BUA	DEDUC	NET	UNITS
GROUND FLOOR	205.20	48.91	156.29	17
FIRST FLOOR	148.57	2.33	146.24	-
SECOND FLOOR	82.85	2.33	80.52	-
TOTAL	436.62	53.57	383.05	17

Total FAR Area for 17 Units = 6,511.85

VILLAS - C TYPE-2

FLOORS	BUA	DEDUC	NET	UNITS
GROUND FLOOR	209.81	50.38	159.43	23
FIRST FLOOR	144.97	2.33	142.64	-
SECOND FLOOR	83.93	2.33	81.60	-
TOTAL	438.71	55.04	383.67	23

Total FAR Area for 23 Units = 8,824.41

COMBINED VILLAS AREA STATEMENT

FLOORS	BUA	DEDUC	NET
GROUND FLOOR	46,911.05	9,217.18	37,693.87
FIRST FLOOR	36,202.54	93.20	36,109.34
SECOND FLOOR	3,338.84	93.20	3,245.64
TERRACE FLOOR	4,193.86	4,193.86	-
TOTAL	90,646.29	13,597.44	77,048.85

AREA STATEMENT OF PREVIOUS SANCTIONED APARTMENT BUILDINGS - 1 TO 11

FLOORS	BUA	DEDUCT	NET	UNITS
LOWER BASEMENT	105,158.88	102,056.85	3,102.03	-
UPPER BASEMENT	110,315.09	101,541.46	8,773.63	-
GROUND FLOOR	24,868.99	505.89	24,363.10	84
FIRST FLOOR	19,212.98	502.00	18,710.98	122
SECOND FLOOR	18,180.55	489.36	17,691.19	124
THIRD FLOOR	18,240.09	489.36	17,750.73	128
FOURTH FLOOR	18,240.09	489.36	17,750.73	128
FIFTH FLOOR	18,240.09	489.36	17,750.73	128
SIXTH FLOOR	18,240.09	489.36	17,750.73	128
SEVENTH FFLOOR	18,240.09	489.36	17,750.73	128
EIGHTH FLOOR	18,240.09	489.36	17,750.73	128
NINTH FLOOR	18,240.09	489.36	17,750.73	128
TENTH FLOOR	18,240.09	489.36	17,750.73	128
ELEVENTH FLOOR	18,240.09	489.36	17,750.73	128
TWELTH FLOOR	18,240.09	489.36	17,750.73	128
THIRTEENTH FLOOR	18,240.09	489.36	17,750.73	128
FOURTEENTH FLOOR	18,240.09	489.36	17,750.73	128
FIFTEENTH FLOOR	18,240.09	489.36	17,750.73	128
SIXTEENTH FLOOR	18,240.09	489.36	17,750.73	128
SEVETEENTH FLOOR	18,240.09	489.36	17,750.73	128
EIGHTEENTH FLOOR	18,240.09	489.36	17,750.73	128
NINTEENTH FLOOR	16,662.64	448.48	16,214.16	120
TWENTYTH FLOOR	16,662.64	448.48	16,214.16	120
TWENTYFIRST FLOOR	16,662.64	448.48	16,214.16	120
TWENTYSECOND FLOOR	16,662.64	448.48	16,214.16	120
TWENTYTHIRD FLOOR	16,662.64	448.48	16,214.16	120
TWENTYFOURTH FLOOR	15,198.23	407.60	14,790.63	108
TWENTYFIFTH FLOOR	13,732.61	366.72	13,365.89	96
TWENTYSIXTH FLOOR	9,962.08	264.52	9,697.56	70
TWENTYSEVENTH FLOOR	9,962.08	264.52	9,697.56	70
TWENTYEIGHTH FLOOR	7,770.00	203.20	7,566.80	52
TWENTYNINTH FLOOR	7,770.00	203.20	7,566.80	52
TERRACE FLOOR	2,519.49	2,519.49	-	-
TOTAL	719,805.62	219,396.97	500,408.65	3426

COMBINED CLUB HOUSE & VILLAS AREA STATEMENT

FLOORS	BUA	DEDUCT	NET
BASEMENT FLOOR	4,875.64	3,504.97	1,370.67
GROUND FLOOR	51,131.84	9,234.15	41,897.69
FIRST FLOOR	38,723.09	98.20	38,624.89
SECOND FLOOR	3,338.84	93.20	3,245.64
TERRACE FLOOR	4,206.20	4,206.20	-
TOTAL	102,275.61	17,136.72	85,138.89

COMBINED AREA STATEMENT OF BUILDING - 1 TO 11, CLUB HOUSE & VILLAS

FLOORS	BUA	DEDUCT	NET	UNITS
LOWER BASEMENT	105,158.88	102,056.85	3,102.03	-
UPPER BASEMENT	115,190.73	105,046.43	10,144.30	-
GROUND FLOOR	76,000.83	9,740.04	66,260.79	355
FIRST FLOOR	57,936.07	600.20	57,335.87	122
SECOND FLOOR	21,519.39	582.56	20,936.83	124
THIRD FLOOR	18,240.09	489.36	17,750.73	128
FOURTH FLOOR	18,240.09	489.36	17,750.73	128
FIFTH FLOOR	18,240.09	489.36	17,750.73	128
SIXTH FLOOR	18,240.09	489.36	17,750.73	128
SEVENTH FFLOOR	18,240.09	489.36	17,750.73	128
EIGHTH FLOOR	18,240.09	489.36	17,750.73	128
NINTH FLOOR	18,240.09	489.36	17,750.73	128
TENTH FLOOR	18,240.09	489.36	17,750.73	128
ELEVENTH FLOOR	18,240.09	489.36	17,750.73	128
TWELTH FLOOR	18,240.09	489.36	17,750.73	128
THIRTEENTH FLOOR	18,240.09	489.36	17,750.73	128
FOURTEENTH FLOOR	18,240.09	489.36	17,750.73	128
FIFTEENTH FLOOR	18,240.09	489.36	17,750.73	128
SIXTEENTH FLOOR	18,240.09	489.36	17,750.73	128
SEVETEENTH FLOOR	18,240.09	489.36	17,750.73	128
EIGHTEENTH FLOOR	18,240.09	489.36	17,750.73	128
NINTEENTH FLOOR	16,662.64	448.48	16,214.16	120
TWENTYTH FLOOR	16,662.64	448.48	16,214.16	120
TWENTYFIRST FLOOR	16,662.64	448.48	16,214.16	120
TWENTYSECOND FLOOR	16,662.64	448.48	16,214.16	120
TWENTYTHIRD FLOOR	16,662.64	448.48	16,214.16	120
TWENTYFOURTH FLOOR	15,198.23	407.60	14,790.63	108
TWENTYFIFTH FLOOR	13,732.61	366.72	13,365.89	96
TWENTYSIXTH FLOOR	9,962.08	264.52	9,697.56	70
TWENTYSEVENTH FLOOR	9,962.08	264.52	9,697.56	70
TWENTYEIGHTH FLOOR	7,770.00	203.20	7,566.80	52
TWENTYNINTH FLOOR	7,770.00	203.20	7,566.80	52
TERRACE FLOOR	6,725.69	6,725.69	-	-
TOTAL	822,081.23	236,533.69	585,547.54	3697

(Including Villas)

Total Ground Floor Area

Building - 01	2,265.48
Building - 02	2,267.98
Building - 02 (Club House)	1,271.41
Building - 03	1,504.76
Building - 04	2,357.35
Building - 05	1,619.62
Building - 06	809.34
Building - 07	2,454.57
Building - 08	1,039.09
Building - 09 & 10	5,967.77
Building - 11	1,635.27
Club House	1,676.35
Club House (Proposed)	4,220.79
Villas	46,911.05
Total	76,000.83

COVERAGE = $\frac{76,000.83}{3,77,725.38} \times 100 = 20.12\% < 50.00\%$

Net FAR Area

Upper Basement Floor	= 3,102.03
Lower Basement Floor	= 8,773.63
Building - 01	= 63,947.87
Building - 02	= 55,415.66
Building - 02 (Club House)	= 2,004.92
Building - 03	= 34,161.51
Building - 04	= 59,839.25
Building - 05	= 44,312.28
Building - 06	= 21,993.07
Building - 07	= 68,779.15
Building - 08	= 28,056.72
Building - 09 & 10	= 71,902.38
Building - 11	= 35,627.25
Club House	= 2,492.93
Club House (Proposed)	= 8,090.04
Villas	= 77,048.85
Total	= 5,85,547.54

FAR = $\frac{5,85,547.54}{3,80,916.96}$ = 1.537 < 2.50

PARKING

Total Nos. of Villas Units from GF to 2nd Floor in All Types = 271 Nos.
@ 2 car / 1 unit, Cars Required = 271 x 2 = 542 cars
10% Visitors Parking = 542 / 10 = 54.20 say 54 cars
Club House Area
Building - 283 Club House = 8,090.04 Sqm.
@ 1 Car / 50.00 Sqm of FAR Area = $\frac{8,090.04}{50}$ = 161.80 Cars Say - 162 Cars

Total cars Required = 542 + 54 + 162 = 758 cars

Cars Required for Previous sanctioned Buildings 1 to 11 = 3,859 cars

Net Total cars Required = 758 + 3,942 = 4,700 cars

Total Cars Provided

Basement Floor Club House - 283	= 78 Cars
Villas GF	= 542 Cars
Lower Basement floor Parce - 01	= 879 Cars
Lower Basement floor Parce - 03	= 947 Cars
Upper Basement floor Parce - 01	= 855 Cars
Upper Basement floor Parce - 03	= 933 Cars
Lower Basement - Bldg. 4, 5 & 6	= 540 Cars
Lower Basement - Bldg. 11	= 161 Cars
Upper Basement - Bldg. 4, 5 & 6	= 527 Cars
Upper Basement - Bldg. 11	= 137 Cars
Total	= 5,599 Cars

LP NO.BBMP/Addl.Dir/ JD NORTH / LP / 0254 / 2014-15

I This Plan Sanctions issued subject to the following conditions

Conditions:

1. 1. Sanction is accorded for the Proposed construction Residential Villas and Club house Building.
   a) Construction of 231 Villas consisting of GF+1 UF & 40 Villas Consisting of GF+2 UF Total 271 Villas and Club House BF+GF+1 UF,
2. Sanction is accorded Residential use only. The use of the building shall not be deviated to any other use.
3. 2Basement Floors area parking shall not be converted for any other purpose.
4. Development charges towards increasing the capacity of water supply, sanitary and power main has to be paid to BWSSB and BESCOM if any.
5. 5. Necessary ducts for running telephone cables, cubicles at ground level for postal services & space for dumping garbage within the premises shall be provided.
6. The applicant shall construct temporary toilets for the use of construction workers and it should be demolished after the construction.
7. The applicant shall INSURE all workmen involved in the construction work against any accident / untoward incidents arising during the time of construction.
8. The applicant shall not stock any building materials / debris on footpath or on roads or on drains. The debris shall be removed and transported to near by dumping yard.
9. The applicant / builder is prohibited from selling the setback area / open spaces and the common facility areas, which shall be accessible to all the tenants and occupants.
10. The applicant shall provide a space for locating the distribution transformers & associated equipment as per K.E.R.C (Es & D) code leaving 3.00 mts. from the building within the premises.
11. The applicant shall provide a separate room preferably 4.50 x 3.65 m in the basement for installation of telecom equipment and also to make provisions for telecom services as per Bye-law No. 25.
12. The applicant shall maintain during construction such barricading as considered necessary to prevent dust, debris & other materials endangering the safety of people / structures etc. in & around the site.
13. The applicant shall plant at least two trees in the premises.
14. Permission shall be obtained from forest department for cutting trees before the commencement of the work.
15. License and approved plans shall be posted in a conspicuous place of the licensed premises. The building license and the copies of sanctioned plans with specifications shall be mounted on a frame and displayed and they shall be made available during inspections.
16. If any owner / builder contravenes the provisions of Building Bye-laws and rules in force, the Architect / Engineer / Supervisor will be informed by the Authority in the first instance, warned in the second instance and cancel the registration if the same is repeated for the third time.
17. Technical personnel, applicant or owner as the case may be shall strictly adhere to the duties and responsibilities specified in Schedule Schedule - IV (Bye-law No. 3.6) under sub section IV-8 (e) to (k).
18. The building shall be constructed under the supervision of a registered structural engineer.
19. On completion of foundation or footings before erection of walls on the foundation and in the case of columnar structure before erecting the columns "COMMENCEMENT CERTIFICATE" shall be obtained.
20. Construction or reconstruction of the building should be completed before the expiry of five years from the date of issue of license & within one month after its completion shall apply for permission to occupy the building.
21. The building should not be occupied without obtaining "OCCUPANCY CERTIFICATE" from the competent authority.
22. Drinking water supplied by BWSSB should not be used for the construction activity of the building.
23. The applicant shall ensure that the Rain Water Harvesting Structures are provided & maintained in good repair for storage of water for non potable purposes or recharge of ground water at all times having a minimum total capacity mentioned in the Bye-law 32(a).
24. The building shall be designed and constructed adopting the norms prescribed in National Building Code and in the "Criteria for earthquake resistant design of structures" bearing No. IS 1893-2002 published by the Bureau of Indian Standards making the building resistant to earthquake.
25. The applicant should provide solar water heaters as per table 17 of Bye-law No. 29 for the building.
26. Facilities for physically handicapped persons prescribed in schedule XI (Bye laws - 31) of Building bye-laws 2003 shall be ensured.
27. The applicant shall provide at least one common toilet in the ground floor for the use of the visitors / servants / drivers and security men and also entrance shall be approached through a ramp for the Physically Handicapped persons together with the stepped entry.
28. The Occupancy Certificate will be considered only after ensuring that the provisions of conditions vide Sl. No. 23, 24, 25 & 26 are provided in the building.
29. The applicant shall ensure that no inconvenience is caused to the neighbours in the vicinity of construction and that the construction activities shall stop before 10.00 PM to avoid hindrance during late hours.
30. 30. Garbage originating from Apartments / Commercial buildings shall be segregated into organic and inorganic waste and should be processed in the Recycling processing unit 3500 K.g, capacity installed at site for its re-use / disposal. (Applicable for residential units of 50 and above and 5000 sqm and above built up area for Commercial building).
31. The structures with basement/s shall be designed for structural stability and safety to ensure for soil stabilization during the course of excavation for basement/s with safe design for retaining walls and super structure for the safety of the structure as well as neighbouring property, public roads and footpaths, and besides ensuring safety of workman and general public by erecting safe barricades.
32. Sufficient two wheeler parking shall be provided as per requirement.
33. Traffic Management Plan shall be obtained from Traffic Management Consultant for all high rise structures which shall be got approved from the Competent Authority if necessary..
34. The owner / Association of highrise building shall obtain clearance certificate from Fire Force Department every Two years with due inspection by the department regarding working condition of Fire Safety Measures installed. The certificate should be produced to the corporation and shall get the renewal of the permission issued once in Two years.
35. The Owner / Association of the highrise building shall get the building inspected by empanelled agencies of the Fire Force Department to ensure that the fire equipments installed are in good and workable condition, and an affidavit to that effect shall be submitted to the corporation and Fire Force Department every year.
36. The owner / Association of highrise building shall obtain clearance certificate from the Electrical Inspectorate every Two years with due inspection by the department regarding working condition of Electrical installations / Lifts etc. The certificate should be produced to the corporation and shall get the renewal of the permission issued once in Two years.
37. The Owner / Association of the highrise building shall conduct two mock - trials in the building, one before the onset of summer and another during the summer and assure complete safety in respect of fire hazards.
38. Payment of license fee for sanction of this plan is subject to result of WP. No. 4906/2008 &2993/2008.
39. If any owner / builder contravenes the provisions of Building Bye-laws and rules in force, the authority will inform the same to the registered Architect / Engineers / Supervisor in the first instance, warn in the second instance and cancel the registration of the professional if the same is repeated for the third time.
40. The Builder / Contractor / Professional responsible for supervision of work shall not shall not materially and structurally deviate the construction from the sanctioned plan, without previous approval of the authority. They shall explain to the owner s about the risk involved in contravention of the provisions of the Act, Rules, Bye-laws, Zoning Regulations, Standing Orders and Policy Orders of the BBMP.
41. The Modified NOC from Fire Force Department, BWSSB and KSPCB should be submitted before obtaining of Commencement Certificate
42. All other conditions laid down by Bangalore Development Authority while approving the Modified Development Plan wide No. BDA / TPM / DLP-65/ 2012-13/3492/2015-16, dt : 22 - 12 - 2015,for the project should be strictly adhered to..
43. In case of any false information, misrepresentation of facts, or pending court cases, the plan sanction is deemed cancelled
44. In case of any false information, misrepresentation of facts, with regard to Revenue document while approval of DP and approval plan, the plan sanction is deemed cancelled

Special Condition as per Labour Department of Government of Karnataka vide ADDENDUM (Hosadaagi Hoodike) Letter No. LD/95/LET/2013, dated: 01-04-2013

1. Registration of Applicant / Builder / Owner / Contractor and the construction workers working in the construction site with the "Karnataka Building and Other Construction workers Welfare Board"should be strictly adhered to .
2. The Applicant / Builder / Owner / Contractor should submit the Registration of establishment and list of construction workers engaged at the time of issue of Commencement Certificate. A copy of the same shall also be submitted to the concerned local Engineer in order to inspect the establishment and ensure the registration of establishment and workers working at construction site or work place.
3. The Applicant / Builder / Owner / Contractor shall also inform the changes if any of the list of workers engaged by him.
4. At any point of time No Applicant / Builder / Owner / Contractor shall engage a construction worker in his site or work place who is not registered with the "Karnataka Building and Other Construction workers Welfare Board"

Note:

1. Accommodation shall be provided for setting up of schools for imparting education to the children of construction workers in the labour camps / construction sites.
2. List of children of workers shall be furnished by the builder / contractor to the Labour Department which is mandatory.
3. Employment of child labour in the construction activities strictly prohibited.
4. Obtaining NOC from the Labour Department before commencing the construction work is a must.
5. BBMP will not be responsible for any dispute that may arise in respect of property in question.
6. In case if the documents submitted in respect of property in question is found to be false or fabricated, the plan sanctioned stands cancelled automatically and legal action will be initiated.

II. NOC Details

Sl No.	Name of the Statutory Department	Reference No. & Date	Conditions Imposed
1)	Fire Force Department	GBC(1)388/2013, dt: 28 - 05 - 2014,	All the conditions imposed in the letter issued by the statutory body should be adhered to.
2)	Airport Authority of India	ASC/CM/(AO)/181/HAL-BG-005/2012, dt: 01 - 02 - 2012,	
3)	BSNL	DE/SAN/BG/S-11/Vol-VIII/12, dated @Bangalore 41, Dt: 09 - 02 - 2012,	
4)	KSPCB	PCB/357/CNP/13H/ 2063, dt: 24 - 03 - 2014,	
5)	BWSSB	BWSSB/EIC/ACE(M)-III/DCE(M)-I/TA(M)-I/13271/2013-14, dt: 17 - 03 - 2014,	
6)	BESCOM	CEE/BMAZ/SEE(O)/AEE-I/F-115/2015-16/5439-42, dt: 28 - 10 - 2015,	
7)	SEIAA	SEIAA 95 CON 2014 dt: 14 - 12 - 2015,	

III. The Applicant has paid the fee vide Receipt No. RE-ifms331-TP / 000021, dated: 14 - Oct - 2015 for the following:-

1.	Licence Fees	:	96,81,547.00
2.	Ground Rent	:	46,10,280.00
3.	Betterment Charges		
	a) For Building	:	2,04,900.00
4.	Security Deposit		1,02,45,023.00
5.	Building constructed without obtaing Authorized Permission	:	1,02,45,023.00
6.	Plan copy charges	:	11,11,800.00
7.	Add 1% for Administrative charges towards labour Cess	:	46,10,280.00
		TOTAL :	2,89,46,065.00
		SAY Rs.	2,89,47,000.00

6. Labour Cess : Rs. 1,74,68,000 /- Paid vide D.D No. 505527 , dated: 13 - 10 - 2015, Drawn on ICICI Bank, Bangalore.

AREA STATEMENT (IN SQM)		
Area of Plot Including Kharab (102 Acres, 11.12 Guntas)	4,13,964.674	Sqm
Area under Kharab	6,601.38	Sqm.
Net Site Area (99 Acres,6.75 Guntas) as per Khata	4,01,318.35	Sqm
Parks & open spaces required @ 10% of the plot area	40,113.84	Sqm.
Area reserved for Parks & open spaces provided	40,912.35	10.19%
Civic Amenities required @ 5% of the plot area	20,065.92	Sqm.
Civic Amenities spaces provided	20,401.39	5.08%
Net Plot Area available for Development after deducting CA Area	3,80,916.96	Sqm.
Site Area reserved for proposed RMP Roads	23,592.97	Sqm
Site Area Considered for Ground Coverage	3,77,725.38	Sqm.
Permissible FAR	2.50	
Permissible FAR Area	9,52,292.40	Sqm
Proposed FAR Area	5,85,547.54	Sqm
Proposed FAR	1.537	
Permissible Ground Coverage	50%	
Permissible Ground Coverage Area	1,88,862.69	Sqm
Proposed Ground Coverage Area	76,000.83	Sqm
Proposed Ground Coverage	20.12%	

ಮೂಲ ಪ್ರತಿ :

OWNER'S SIGNATURE
Authorised Signatory

ENGINEER'S SIGNATURE
RAJESH KUMAR.N
BCC/BL/3.6/E:3378:09-10

PROJECT TITLE :
PROPOSED RESIDENTIAL VILLAS AND CLUB HOUSE BUILDING AT KHATHA NO. 617, MUNICIPAL NO. 52, GUNJUR VILLAGE SY NO. 176/1, 178/2, 178/3, 179, 180/1, 180/2, 181/1, 181/2, 181/3, 181/4, 182, 183/1, 183/2, 183/3, 183/4, 184/1, 184/2, 186/1, 187/2, 188/2, 188/5A, 188/5B, 189/1, 190/1, 190/2, 191/1, 191/3, 192/3, 192/4, 195/1, 196, 197/1, 197/2, 197/3, 198/1, 198/2, 199, 200/2, 203/1, 203/2, 204/1, 204/2, 204/3, 204/4, 204/5, 204/6, 204/7A, 204/7B, 205/1, 205/2, 205/3, 205/4, 205/5, 207/1, 207/2, 207/3, 207/4, 207/5, 207/6, 208, 210/1, 210/3, 210/4, 210/5, 210/6A, 210/6B, 210/7A, 210/7B, 210/8, 210/9, 210/10, 210/11, 210/12, 210/13A, 210/13B, 210/15A, 210/15B, 210/16, 210/17, 210/18, 211/1, 211/2, 211/6A, 211/7, 220/1, AND BALAGERE VILLAGE SY NO. 28/5, 28/11, 28/13, 28/14 & 28/16. VARTHUR HOBLI, WARD NO.149, MAHADEVAPURA ZONE, BANGLAORE.

PROPOSED BUILDING	
RMP 2015 VALLEY ZONE	
SITE BOUNDARY	
SETBACK LINE	
BUILDING EXTENT	
BASEMENT EXTENT	
CIVIC AMENITIES	
PARKS & OPEN SPACE	

SANCTION DRAWING

ORIENTATION : N
SHEET NO : 01 OF 14

PROJECT CONSULTANTS:
RSP Design Consultants (India) Pvt Ltd.
RSP HOUSE, # 30, MUSEUM ROAD, BANGALORE - 560001 TEL: 25596688 FAX : 25596618

SUBJECT OF DRAWING : SITE PLAN

FILENAME :
SCALE : 1:1200 | DATE :
DRAWN : SATHEESHA | CHECKED : RAMPRASAD
JOB NO : 11314 | DRAWING NO : SD - 01